

CARE AND CLEANING

Studio features Resilience^{SR} for added protection.

Prompt cleaning is always recommended. Please follow the guide below by type of stain. It is always recommended to rinse or wipe with fresh water after cleaning.

Regular Cleaning and Maintenance.

Clean with mild soap and water then rinse with fresh water and wipe dry with a clean cloth.

- Dirt
- Dust
- Grime

For Food or Oil Based Stains.

Wipe affected area with a soft cloth or soft bristle brush using a non-abrasive cleaner, for example Formula 409™ or Fantastik™. Then rinse the fresh water and wipe dry.

- Ketchup
- Coffee/Tea
- Wine
- Soy Sauce

Healthcare Environments.

Clean/Disinfect the soiled area with a 10% solution of household bleach and water. It is important to rinse the cleaned area with fresh water after applying the bleach solution.

- Blood
- Urine
- Betadine/Iodine

Difficult Stains.

Clean the soiled area with 50% solution of Isopropyl Alcohol (rubbing alcohol) and water. It is important to rinse the cleaned area with fresh water after applying the alcohol solution.

- Mascara/Eye Shadow
- Lipstick



Resilience^{SR} represents the latest in technology in Faux Leather and Vinyl Protection, enhancing performance where it is needed the most:

Stain Resistance: With proper care, materials treated with **Resilience^{SR}** can be easily cleaned and will guard against stain maintaining the desired surface appearance for years to come.

Anti-Microbial & Anti-Bacterial Protection: Products treated with **Resilience^{SR}** are engineered to inhibit bacterial growth, as well as fungus, mold and spores, resulting in a more hygienic environment.

Abrasion Resistance: **Resilience^{SR}** provides additional wear properties and surface durability to any Vinyl or Faux Leather, thereby increasing the life of the material.

Resilience^{SR} is not visible, and does not affect the hand of the material. **Resilience^{SR}** is engineered to last, even after repeated cleaning and wear. Specify **Resilience^{SR}** for the most demanding healthcare and hospitality applications.

NOTE: The use of commercial vinyl conditioners and protectants is NOT RECOMMENDED.

The information in this cleaning guide does not guarantee the performance of Resilience^{SR}. This information does not relieve the user from the responsibility of the proper and safe use of the product and referenced cleaning agents.



STUDIO – CANYON PERSUASION PHOENIX VIBE

APPLICATIONS

Hospitality, Healthcare, Contract, Education, Automotive & RV, Residential

GENERAL SPECIFICATIONS

Width	54"
Roll Size	30 Yards
Weight	28 Ounces per Linear Yard
Composition	Surface: 100% Phthalate Free PVC Backing: 100% Brushed Polyester Knit

PERFORMANCE SPECIFICATIONS

Abrasion Resistance	250,000+ Double Rubs ASTM D 4157-13 Wyzenbeek / CFFA-1A
Anti Microbial/Mildew Resistant	Pass ASTM G21-09 / CFFA-120
Anti Microbial	Pass AATCC 147 / CFFA-300
Colorfastness to Light	650 Hours per AATCC Test Method 16-2012, Option 3 / CFFA-2 (Xenon-Arc)
Cold Crack	-20° F per Federal Standard No. 191A-TM5874 / CFFA-6
Stain Resistant	with Resilience ^{SR} Protection
Sulfide Stain Resistant	

FLAMMABILITY REQUIREMENTS *

California Fire Code Technical Bulletin No. 117, 2013
BIFMA Section 3 & 4
UFAC Class 1
MVSS 302
NFPA 260
IMO 2010 FTP Code-MSV 88/26/Add.2 Part 8(3.1 & 3.2)

REDUCED ENVIRONMENTAL IMPACT

16P Phthalate Free (includes all Phthalates listed in CAL PROP 65 and CPSIA)
Lead Free
BPA Free / Tris Free / Formaldehyde Free
Does not contain Conflict Minerals

STUDIO

CANYON PERSUASION PHOENIX VIBE



A Division of 
14815 Radburn Ave.
Santa Fe Springs, CA 90670

Phone (562) 802-0464
Toll Free Fax (866) 624-9662
Toll Free Phone (866) 624-4968

Email: sales@ocisitwell.com




GRADE 2

Please visit our Website
www.ocisitwell.com

PROP 65 WARNING: This product may contain a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

* This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions. 06.16

PERSUASION

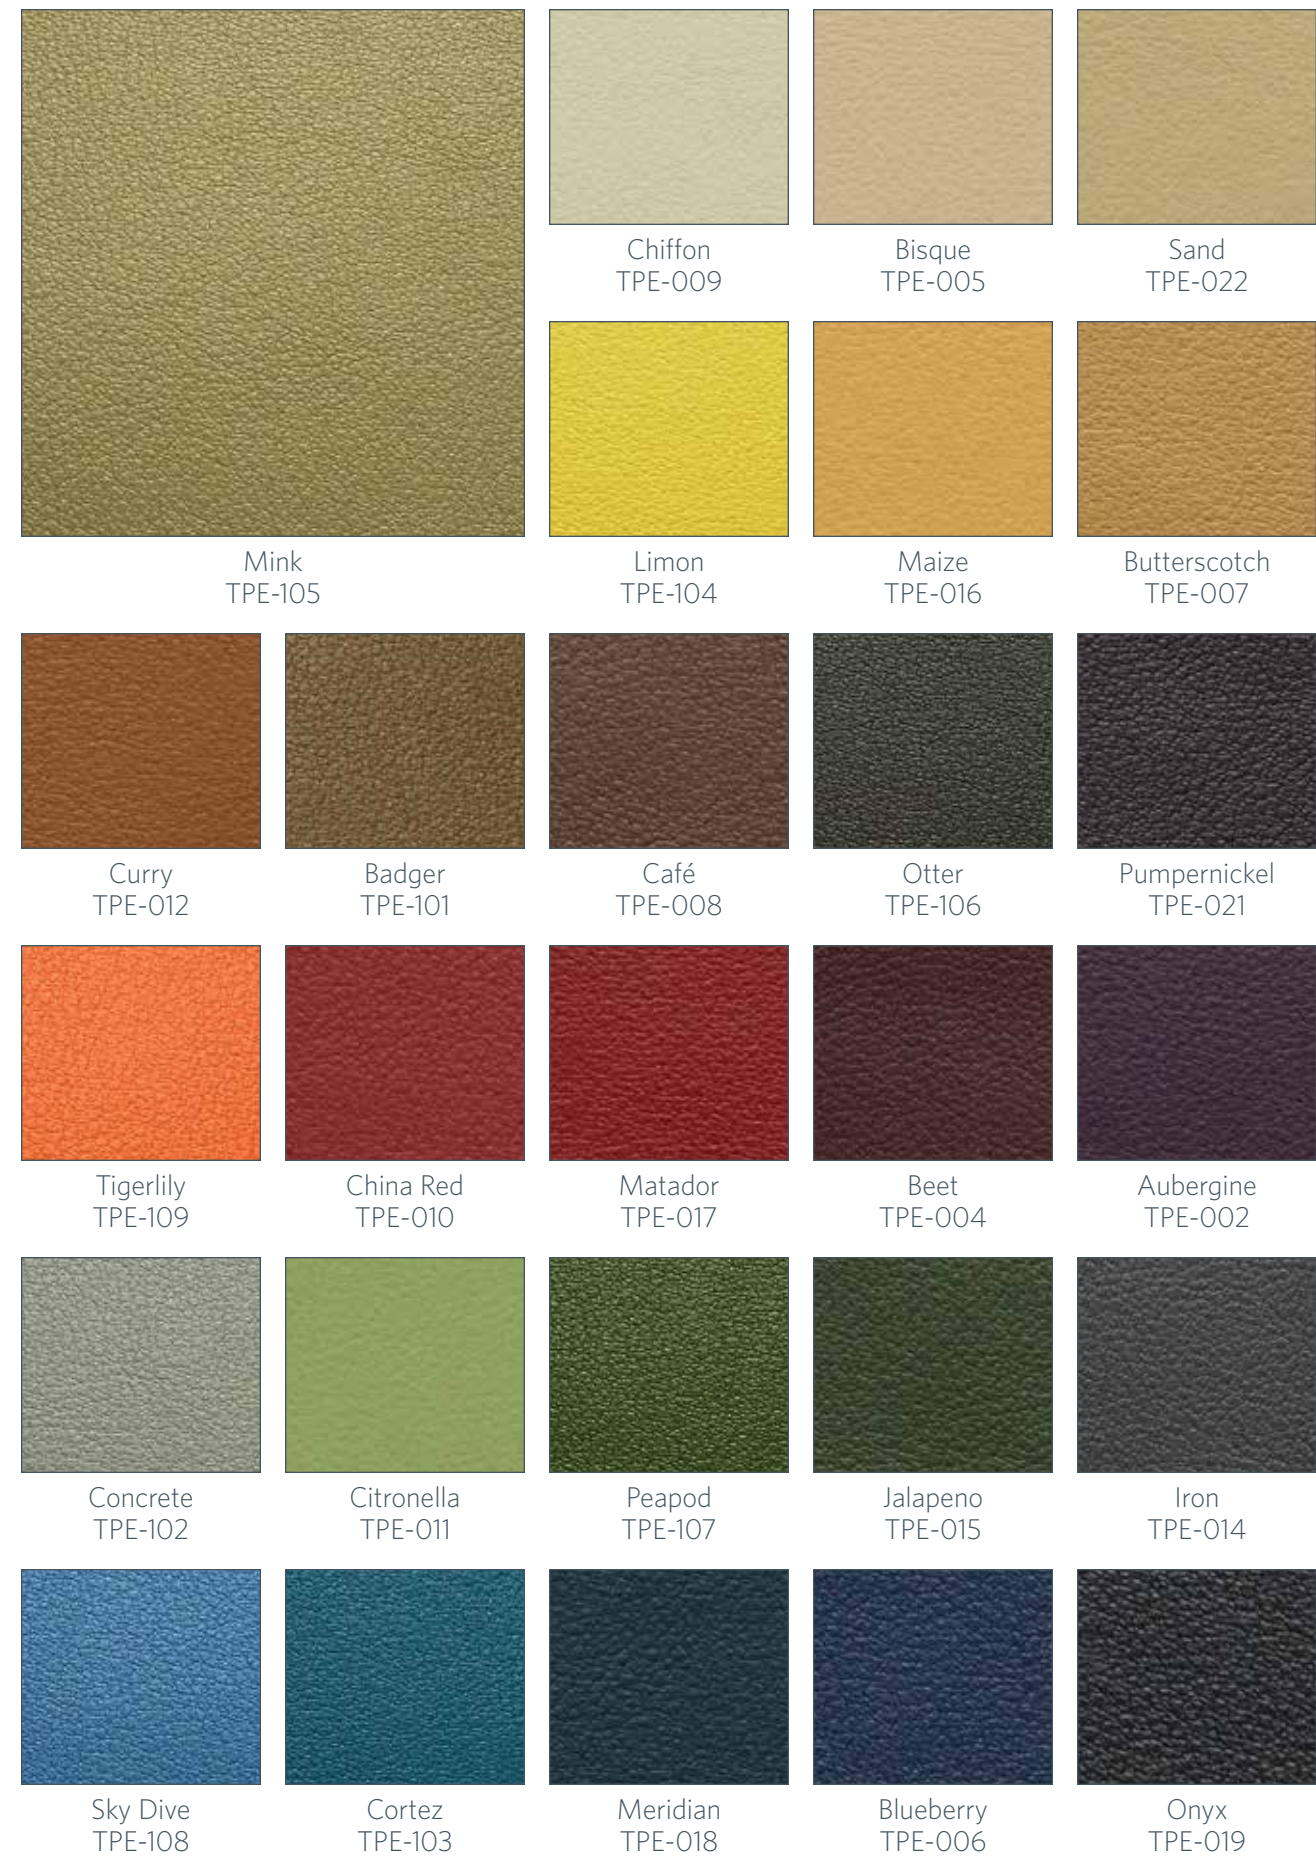

CANYON



PHOENIX



VIBE

